

PRODUCT DESCRIPTION

CPD 0500S


A self-wound white or canary yellow 50# offset paper coated with acrylic microsphere adhesive on one side and non-silicone release coating on the opposite side. Label material can be overprinted by flexco, inkjet and thermal transfer.

ADHESIVE PROPERTIES

CPD 0500S Repositionable Microsphere Adhesive

Adhesion Peel Force to Stainless Steel, 10 Minutes	1.0 OZ/IN (90° Angle, @ 12ipm)
Adhesion Peel Force to Stainless Steel, 24 Hrs.	1.5 OZ/IN (90° Angle, @ 12ipm)
Release Force, From Itself	2.0 OZ/IN (90° Angle, @ 300ipm)

CONSTRUCTION

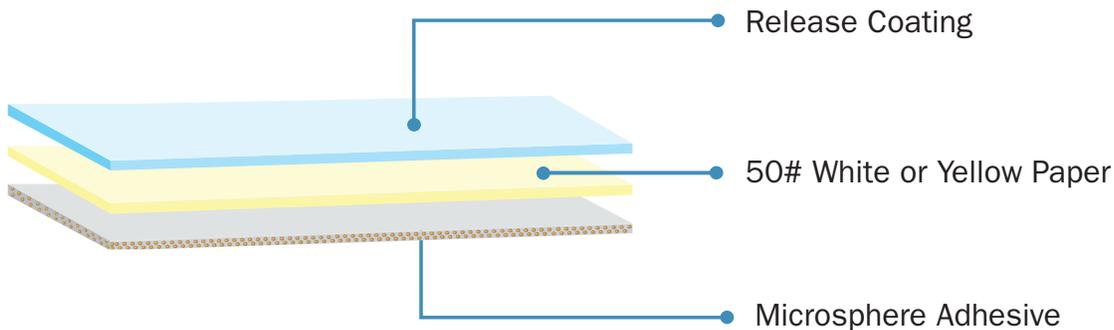

PAPER

Paper Weight: 81.0 grams/meter²

Paper Thickness: 89.0 microns (μm)

As with any removable/repositionable adhesive labelstock, it is the responsibility of the user to test the adhesive against the intended surface for compatibility and functionality.



+1 (315) 430-3011



6761 Thompson Road
Syracuse, NY 13211



dlewis@cpdcoating.com