

### PRODUCT DESCRIPTION

#### CPD 060SG/700

Bright white, 60# semi-gloss labelstock with an acrylic microsphere repositionable adhesive. Linerless and self-wound using a non-silicone release agent. Printable with water-based and UV flexo.

### ADHESIVE PROPERTIES



#### CPD 700 Repositionable Microsphere Adhesive

Adhesion to Stainless Steel	0.5 OZ/IN @ 12ipm
Release From Self	1.0 OZ/IN @ 300ipm
Application Temperature (minimum)	40°F (4°C)
Application Temperature (maximum)	120°F (49°C)
Service Temperature (minimum)	0°F (-17°C)
Service Temperature (maximum)	120°F (49°C)

### CONSTRUCTION

60# Offset

CPD 700 Microsphere Adhesive Technology

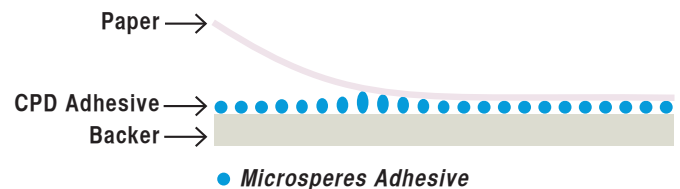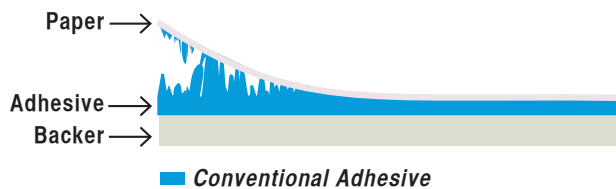

As with any removable/repositionable adhesive labelstock, it is the responsibility of the user to test the adhesive against the intended surface for compatibility and functionality.

